



SELF-CONTAINED COMPACTOR




STANDARD SPECIFICATIONS

6" x 2" x 1/4" Longsills
1- 1/4" Solid Bullnose Inserted 4" and Fully Welded
1/2" Pull Plate with 1-1/4" Pull Hook (Double-End Pick-Up)
4" x 6" Solid Steel Nosecone Rollers with 1/2" Plate Brackets
3" Structural Channel Crossmembers on 16" Centers
8" Diameter x 6" Long Front and Rear Ground Rollers
7 Ga Floor
7 Ga Roof
7 Ga Front Sheet
7 Ga Side Sheets with (1) 3" Diameter Fire Dept. Fitting and Plug Per Side
10 Ga Rear Door Sheet
Clear Top Opening: 37.2" x 57.5"
Cycle Time: 42.3 Seconds
Total Normal Force: 39,650 lbs
Total Maximum Force: 44,055 lbs
Normal Ram Face Pressure: 23.5 psi
Maximum Ram Face Pressure: 26.2 psi
Ram Penetration: 11 inches
Motor: 10 hp
Pump: 10.5 gpm
Normal Hydraulic Pressure: 1,800 psi
Maximum Hydraulic Pressure: 2,000 psi
Cylinder Stroke (Dual Cylinders): 37 inches
Cylinder Bore (Dual Cylinders): 4 inches
Cylinder Rod Diameter (Dual Cylinders): 2 inches
Hydraulic Reservoir Capacity: 20 gallons
Primed and Painted Any Standard Color

*ALL MEASUREMENTS ARE NOMINAL

OPTIONS AVAILABLE UPON REQUEST

All designs and specifications are subject to change at the manufacturer's sole discretion at any time without notice. The data published herein is informational in nature and should not be misconstrued to warrant suitability of the unit for any purpose as performance may vary with the conditions encountered. Products must be installed and operated with all applicable standards, codes, regulations, and recommended safety procedures.

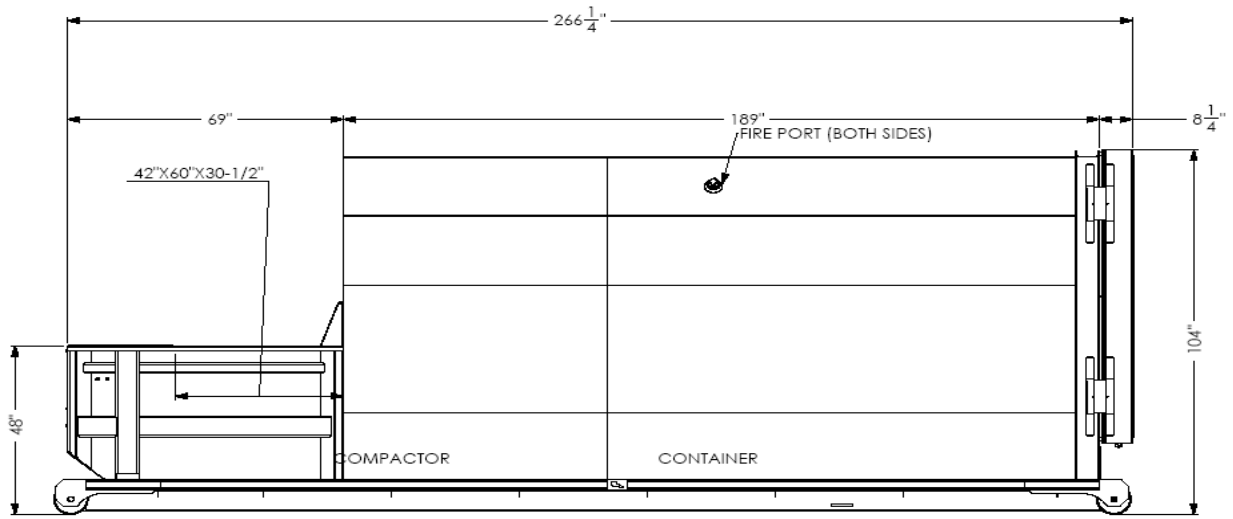

MODEL NUMBER	CUBIC YARDS	APPROX. WEIGHT	QTY PER LOAD
R250SC-30-NL	34	10,500 LBS.	2



Refuse Handling and Recycling Equipment – Sales & Service

P.O. Box 1527 ♦ Easley, South Carolina 29641
2266 Powdersville Rd. ♦ Easley, South Carolina 29642

(864) 295-2183 ♦ (800) 654-1752

(864) 306-3775 FAX

e-mail: sales@nulife1.com

Website: www.nulifeenv.com