



2-CY STATIONARY COMPACTOR





STANDARD SPECIFICATIONS

Clear Top Opening	37.2 In x 57.5 In
Cycle Time	42.3 Seconds
Normal Force (Total)	39,650 Pounds
Maximum Force (Total)	44,055 Pounds
Normal Ram Face Pressure	23.5 PSI
Maximum Ram Face Pressure	26.2 PSI
Ram Penetration	11 Inches
Motor	10 HP
Pump	10 GPM
Normal Pressure (Hydraulic)	1,800 PSI
Maximum Pressure (Hydraulic)	2,000 PSI
Cylinder Stroke (2 Cylinders)	37 Inches
Cylinder Bore (2 Cylinders)	4 Inches
Rod Diameter (2 Cylinders)	2 Inches
Reservoir Capacity	20 Gallon

*ALL MEASUREMENTS ARE NOMINAL

OPTIONS AVAILABLE UPON REQUEST

All designs and specifications are subject to change at the manufacturer's sole discretion at any time without notice. The data published herein is informational in nature and should not be misconstrued to warrant suitability of the unit for any purpose as performance may vary with the conditions encountered. Products must be installed and operated with all applicable standards, codes, regulations, and recommended safety procedures.

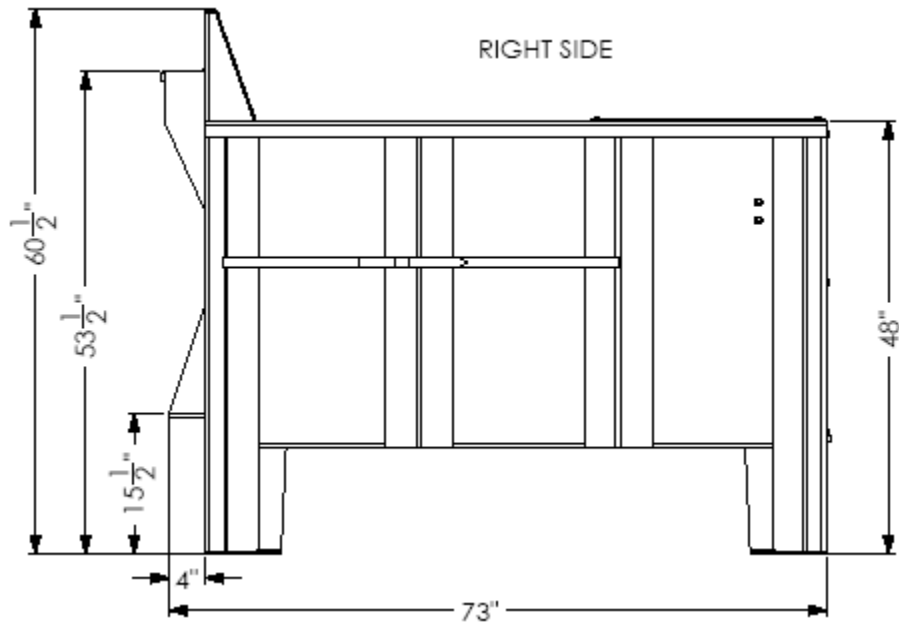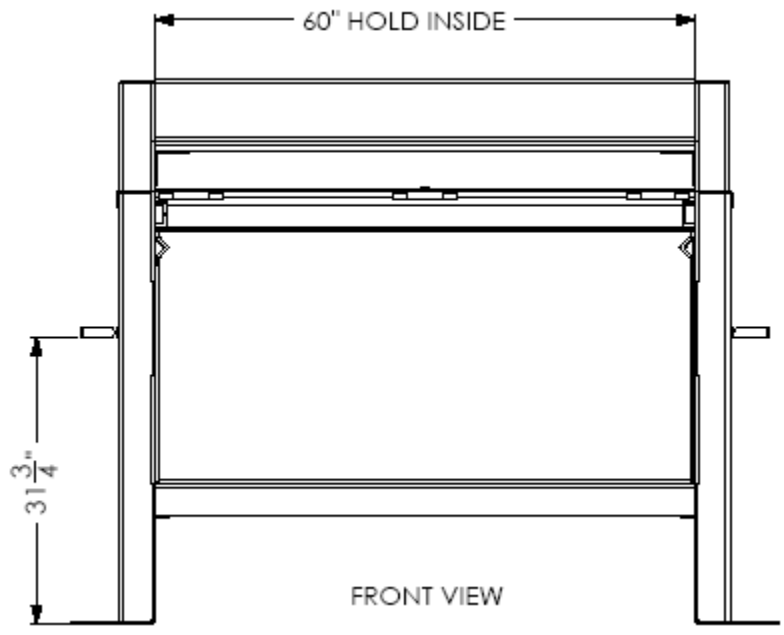

Refuse Handling and Recycling Equipment – Sales & Service

P.O. Box 1527 ♦ Easley, South Carolina 29641
2266 Powdersville Rd. ♦ Easley, South Carolina 29642

(864) 295-2183 ♦ (800) 654-1752
(864) 306-3775 FAX

e-mail: sales@nulife1.com
Website: www.nulifeenv.com